



TELEPHONE MAN OF AMERICA
1-866-770-4930
TELEPHONEMAN@TELEPHONEMANOFAMERICA.COM
Earning Your Business Every Step of the Way!
Specializing in Telecom Equipment of all Brands, Carrier Services,
Technician Services, Maintenance Agreements & Purchasing Excess
Telecom Equipment!

I will always do my best to match or beat any competitors bid!

TELEPHONE MAN OF AMERICA

Earning Your Business Every Step of the Way!

Specializing in Telecom Equipment of all Brands, Carrier Services, Technician Services, Maintenance Agreements & Purchasing Excess Telecom Equipment!

I will always do my best to match or beat any competitors bid!

| Local: 863-614-1900 | Toll Free: 866-770-4930 | Fax: 888-782-3072 |

Email: telephoneman@telephonemanofamerica.com |

URL: www.TelephonemanOfAmerica.com | URL: www.AvayaPartnerAcs.com | URL: www.AvavayMerlinLegend.com | URL: www.EnGeniusCordlessPhones.com | URL: www.SkypeMyPBX.com | URL: www.shop.telephonemanofamerica.com |

AVAYA Merlin Legend

Up To 220 Phones!

INVENTORY INSTRUCTIONS FOR AVAYA MERLIN LEGEND PHONE SYSTEMS

Performing an inventory is important to determine what features are available to you by finding out the release of the Merlin Legend Processor, what your capacity for lines and extensions are now and what room for growth is available and overall an awareness of your phone system.

The system inventory can be done on the MLX20L programming phone. Select **MENU** → Then **MAINTENANCE** → Then **SYSTEM** → Then **INVENTORY**. From here you the System's Processor release is identified. It will say System Inventory, Slot 00, Board Processor, Hardware Vintage, Legend _._. Notate the Release and select the **MORE** button to identify the other Expansion Boards - i.e. 408 GS/LS MLX, 800 GS/LS, 016 MLX, Merlin Messaging etc. There are up to 17 slots available. When the inventory report says **EMPTY** you are done.

For some items it will be necessary to go to where the phone system is located to verify. Some times the report will be false so it is always good to where the system is and re-verify. For example if you know you have a system Voice Mail solution and the report does not show this go and verify the report with the actual system.




The system will be in a Carrier that will look like . The Processor and Messaging Solution may

have a PC card in them (**DO NOT REMOVE THEM**) and look like or . The Expansion Boards will all be labeled like below.



Typical Merlin Legend System

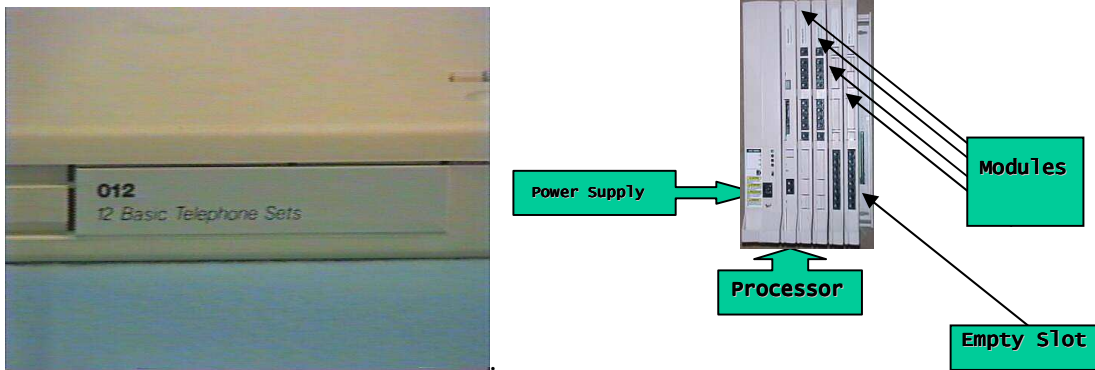

The naming convention of the modules is such that the first digit represents the number of maximum lines and the following 2 digits represent the maximum number of extensions the module can support.

The phones should be marked as MLX 5, 10, 10D, 10DP, 16DP, 20L etc. under the handset of the phone. If the phones are not labeled just count the number of programmable buttons and if there is a LCD display screen. Example the MLX 10DP will have 10 programmable buttons – not including the key pad etc but only the top

